


DOUBLE BRAID NYLON

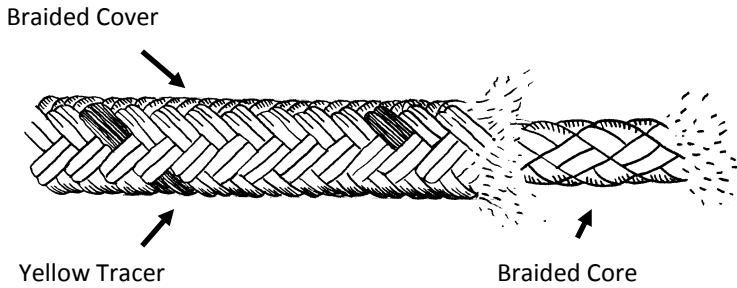

Construction:

- ◆ Braided outer cover, over braided inner core
- ◆ 100% continuous filament Nylon 6/6
- ◆ Standard colour; white
- ◆ Colour coding available
- ◆ Other standard colours; blue, red, green & black
- ◆ Meets or exceeds Canadian Spec 40-GP-16M & Nato Class 4020 Supp. 1972
- ◆ Urethane coating to increase abrasion resistance, available in orange, red, green, blue & yellow
- ◆ Custom lengths and splices

Features:

- ◆ Excellent UV Resistance
- ◆ Excellent abrasion resistance
- ◆ Excellent dielectric properties
- ◆ High Elongation
- ◆ Withstands dynamic loading
- ◆ Flexible, torque free
- ◆ Spliceable
- ◆ Sinks in water (S.G. = 1.14)

Applications:

- ◆ Mooring, Anchor, Fender & Towing Lines
- ◆ General purpose slings
- ◆ Any application where a strong, shock absorbing rope is required

Product Code	Size Inches	Size mm	Tensile* Lbs	L.D. Lbs/Kft
NYDB316	3/16"	4.8	1632	9.50
NYDB14	1/4"	6.4	2040	15.30
NYDB516	5/16"	7.9	3264	25.50
NYDB38	3/8"	9.5	5202	35.70
NYDB716	7/16"	11.1	6732	43.86
NYDB12	1/2"	12.7	8670	62.22
NYDB916	9/16"	14.3	11016	91.80
NYDB58	5/8"	15.9	16728	117.30
NYDB34	3/4"	19.1	20604	144.84
NYDB78	7/8"	22.2	28662	214.20
NYDB1	1"	25.4	30600	252.20
NYDB118	1 1/8"	28.6	43860	365.16
NYDB114	1 1/4"	31.8	52632	398.82
NYDB138	1 3/8"	34.9	67524	530.40
NYDB112	1 1/2"	38.1	75480	612.00
NYDB158	1 5/8"	41.3	92820	754.80
NYDB134	1 3/4"	44.5	111180	867.00
NYDB178	1 7/8"	47.6	121380	963.90
NYDB2	2"	50.8	131580	1060.80

* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue *



Professional Engineers
Ontario



MCM ROPES & RIGGING LTD.

www.mcmropes.com