


DOUBLE BRAID POLYESTER

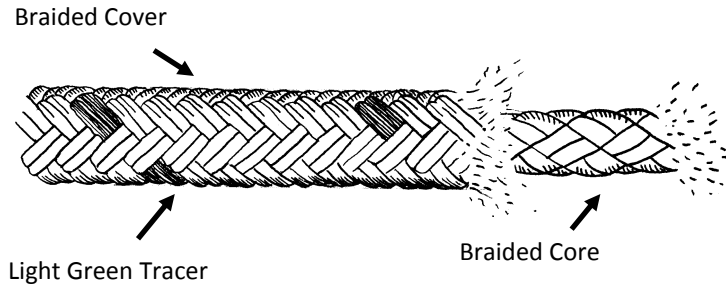

Construction:

- ◆ Braided outer cover, over braided inner core
- ◆ 100% continuous filament Polyester
- ◆ Standard colour; white
- ◆ Colour coding available
- ◆ Other standard colours; blue, red, green & black
- ◆ Meets or exceeds Canadian Spec 40-GP-16M & Nato Class 4020 Supp. 1972
- ◆ Urethane coating to increase abrasion resistance, available in orange, red, green, blue & yellow
- ◆ Custom lengths and splices

Applications:

- ◆ Halyards, and sheets for running rigging
- ◆ Stringing lines, winch lines, sling and fall lines
- ◆ Topping lifts, and chokers

Features:

- ◆ Excellent UV resistance
- ◆ Excellent abrasion resistance
- ◆ Excellent dielectric properties
- ◆ Low stretch
- ◆ Flexible, torque free
- ◆ Sinks in water (S.G. = 1.38)

Product Code	Size Inches	Size mm	Tensile* Lbs	L.D. Lbs/Kft
PEDB316	3/16"	4.8	1800	11.4
PEDB14	1/4"	6.4	2700	25
PEDB516	5/16"	7.9	3900	36
PEDB38	3/8"	9.5	5200	50
PEDB716	7/16"	11.1	7200	63
PEDB12	1/2"	12.7	9500	89
PEDB916	9/16"	14.3	11700	106
PEDB58	5/8"	15.9	16300	142
PEDB34	3/4"	19.1	20100	172
PEDB78	7/8"	22.2	27200	246
PEDB1	1"	25.4	36300	323
PEDB118	1 1/8"	28.6	45000	420
PEDB114	1 1/4"	31.8	56800	513
PEDB1516	1 5/16"	33.3	61000	570
PEDB112	1 1/2"	38.1	78000	680
PEDB158	1 5/8"	41.3	89000	850
PEDB134	1 3/4"	44.5	104000	1010
PEDB2	2"	50.8	124000	1230
PEDB218	2 1/8"	53.9	145000	1440
PEDB214	2 1/4"	57.2	166000	1680
PEDB212	2 1/2"	63.5	190000	1960
PEDB258	2 5/8"	66.7	212000	2160
PEDB234	2 3/4"	69.9	234000	2460
PEDB3	3"	76.2	278000	2930

* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue *



Professional Engineers
Ontario



MCM ROPES & RIGGING LTD.



www.mcmropes.com