


# 3 STRAND POLYPROPYLENE

3 Twisted Strands

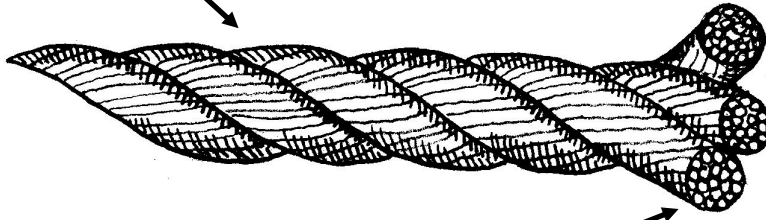

Strands Composed of Twisted Yarns

Product Code	Size Inches	Size mm	Tensile* Lbs	L.D. Lbs/ Kft
PP3S316	3/16"	4.8	720	7.9
PP3S14	1/4"	6.4	1050	11
PP3S516	5/16"	7.9	1700	18
PP3S38	3/8"	9.5	2450	29.5
PP3S12	1/2"	12.7	3600	45
PP3S58	5/8"	15.9	5500	77.5
PP3S34	3/4"	19.1	8000	120.8
PP3S78	7/8"	22.2	10400	150
PP3S1	1"	25.4	12250	193.3
PP3S118	1 1/8"	28.6	17300	228.3
PP3S114	1 1/4"	31.8	20375	276.6
PP3S112	1 1/2"	38.1	28850	394
PP3S158	1 5/8"	41.3	36200	460
PP3S134	1 3/4"	44.5	38700	530
PP3S2	2"	50.8	45800	690

\* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue \*

## Features:

- ◆ Good strength
- ◆ No loss of strength when wet
- ◆ UV Stabilized
- ◆ Fair abrasion resistance
- ◆ Fair shock absorption
- ◆ Resists rot and mildew, stores wet
- ◆ Excellent resistance to acids and alkalis
- ◆ Floats (S.G. =0.91)
- ◆ Economical

## Construction:

- ◆ Three strand rope
- ◆ 100% mono-filament Polypropylene
- ◆ Standard colour; Yellow
- ◆ Other colours available; Red, Blue, Green, Orange, Blue, Black & White

## Applications:

- ◆ Any commercial or recreational application where a strong, economical rope is required.
- ◆ Suitable for mechanical & electrical pulling lines, hand lines, floating lines & general purpose lines



Professional Engineers  
Ontario



**MCM ROPES & RIGGING LTD.**    
www.mcmropes.com