


DOUBLE LOCKING HOOKS



Double Locking Snap Hook

- ◆ 3/4" (19.1mm) Gate opening
- ◆ Material; SAE 4130 Alloy Steel
- ◆ 100% proof loaded to 3,600lbs (16kN)
- ◆ Min. Major Axis Tensile strength 5,000lbs (22.2kN)
- ◆ Weight approx. 13.7oz (390g)
- ◆ Meets or exceeds ANSI Z-359.12-11
- ◆ **Certified CSA Z-259.2.5-12**

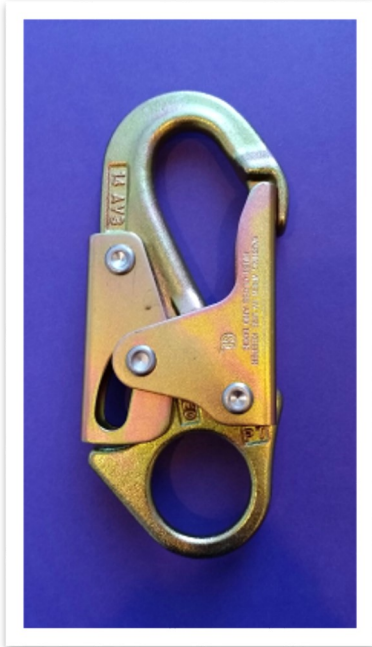

Double Locking Ladder Hook

- ◆ 2" (50.8mm) Gate opening
- ◆ Material; SAE 4130 Alloy Steel
- ◆ 100% proof loaded to 3,600lbs (16kN)
- ◆ Min. Major Axis Tensile strength 5,000lbs (22.2kN)
- ◆ Weight approx. 19oz (543g)
- ◆ Meets or exceeds ANSI Z-359.12-09
- ◆ **Certified CSA Z-259.2.5-12**



Professional Engineers
Ontario



MCM ROPES & RIGGING LTD.



www.mcmropes.com