


DOUBLE BRAID POLYESTER / SPECTRA

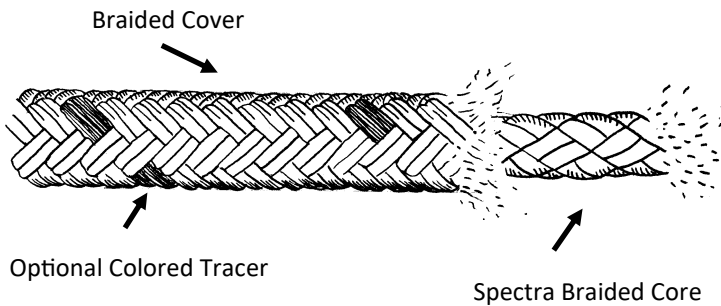

Features:

- ◆ Excellent UV resistance
- ◆ Excellent abrasion resistance
- ◆ Excellent dielectric properties
- ◆ Withstands dynamic loading
- ◆ Flexible, torque free
- ◆ Spliceable

Construction:

- ◆ Braided outer Polyester cover, over braided inner Spectra core
- ◆ 100% continuous filament Polyester and Spectra fibres
- ◆ Standard Color; white
- ◆ Color Coding available
- ◆ Other colours; blue, red, green & black
- ◆ Meets or exceeds Canadian Spec 40-GP-16M & Nato Class 4020 Supp.1972
- ◆ Urethane coating to increase abrasion resistance, available in orange, red, green, blue & yellow
- ◆ Custom lengths and splices available

Applications:

- ◆ Where a very strong, low stretch, and light lifting or pulling line is required
- ◆ Halyards and sheets for running rigging
- ◆ Stringing lines, winch lines, sling and fall lines
- ◆ Topping lifts and chokers

Product Code	Size Inches	Size mm	Tensile* Lbs	L.D. Lbs/Kft
PEDBS316	3/16"	4.8	2200	10.7
PEDBS14	1/4"	6.4	3800	22
PEDBS516	5/16"	7.9	6600	35
PEDBS38	3/8"	9.5	9200	41
PEDBS716	7/16"	11.1	13700	61
PEDBS12	1/2"	12.7	20445	83
PEDBS916	9/16"	14.3	23925	100
PEDBS58	5/8"	15.9	36250	126
PEDBS34	3/4"	19.1	44660	160
PEDBS78	7/8"	22.2	50015	248
PEDBS1	1"	25.4	69600	306
PEDBS118	1 1/8"	28.6	98310	370
PEDBS114	1 1/4"	31.8	116000	426
PEDBS112	1 1/2"	38.1	147900	690

* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue *



Professional Engineers
Ontario



MCM ROPES & RIGGING LTD.

www.mcmropes.com