


# 3 STRAND NYLON

Three Twisted Strands

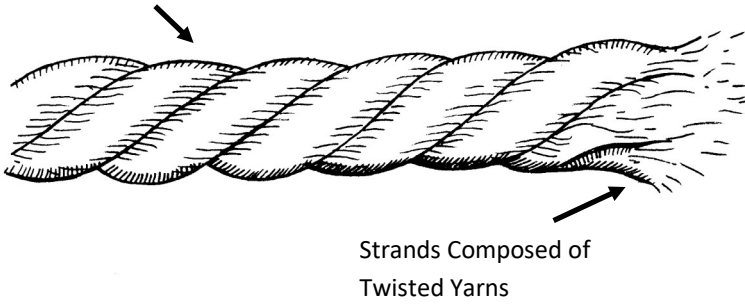

**Features:**

- ◆ Good Strength
- ◆ Good abrasion resistance
- ◆ Withstands dynamic loading
- ◆ High elongation
- ◆ UV Stabilized
- ◆ Resists rot and mildew
- ◆ Sinks in water (S.G. = 1.14)
- ◆ 15% less strength when wet

**Construction:**

- ◆ Three Strand Rope
- ◆ Industrial construction
- ◆ 100% type 6/6 Nylon
- ◆ Standard colour; White
- ◆ Black, Blue & Red colours available, minimum quantities apply

**Applications:**

- ◆ Any commercial or recreational application where a strong, shock absorbing rope is required
- ◆ Suitable for mooring and anchor lines
- ◆ General purpose lines and slings

Product Code	Size Inches	Size mm	Tensile* Lbs	L.D Lbs/Kft
1706	3/16"	4.8	880	8.9
1708	1/4"	6.4	1665	15.7
1710	5/16"	7.9	2610	24.5
1712	3/8"	9.5	3700	35.5
1716	1/2"	12.7	6525	63
1720	5/8"	15.9	10200	99
1724	3/4"	19.1	14500	143
1728	7/8"	22.2	19500	195
1732	1"	25.4	25225	253
1736	1 1/8"	28.6	31500	320
1740	1 1/4"	31.8	38700	397
1742	1 5/16"	33.3	42500	437
1748	1 1/2"	38.1	55000	570
1752	1 5/8"	41.3	64400	673
1756	1 3/4"	44.5	74400	780
1764	2"	50.8	100300	1000
1772	2 1/4"	57.2	121500	1270
1780	2 1/2"	63.5	149400	1570
1796	3"	76.2	209800	2260

\* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue \*



Professional Engineers Ontario



# MCM ROPES & RIGGING LTD.

