


DOUBLE BRAID POLYESTER / DYNEEMA®

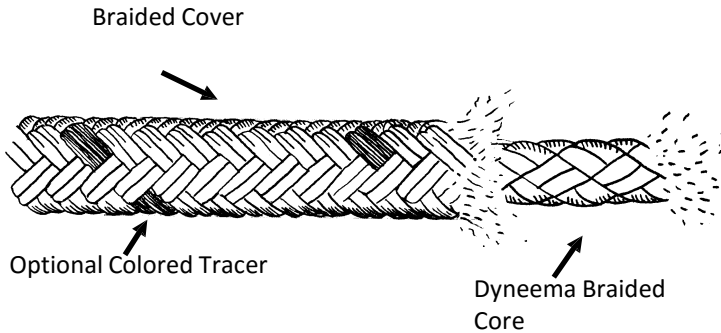

Features:

- ◆ Excellent UV resistance
- ◆ Excellent abrasion resistance
- ◆ Extreme high strength
- ◆ High Elongation
- ◆ Withstands dynamic loading
- ◆ Flexible, torque free
- ◆ Spliceable

Construction:

- ◆ Braided outer Polyester cover, over braided inner Dyneema® core
- ◆ 100% continuous filament Polyester and Dyneema® fibers
- ◆ Standard Color; white
- ◆ Color Coating available
- ◆ other colors; blue, red, green & black
- ◆ Urethane coating to increase abrasion resistance, available in orange, red, green, blue & yellow
- ◆ Custom lengths and splices available

Applications:

- ◆ Where a very strong, low stretch, and light lifting or pulling line is required
- ◆ Halyards and sheets for running rigging
- ◆ Stringing lines, winch lines, sling and fall lines
- ◆ Topping lifts and chokers

Product Code	Size Inches	Size mm	Tensile* Lbs
PEDBD14	1/4"	6.4	5500
PEDBD516	5/16"	7.9	8700
PEDBD38	3/8"	9.5	13300
PEDBD716	7/16"	11.1	16300
PEDBD12	1/2"	12.7	19500
PEDBD916	9/16"	14.3	23500
PEDBD58	5/8"	15.9	34000
PEDBD34	3/4"	19.1	41200
PEDBD78	7/8"	22.2	52500
PEDBD1	1"	25.4	66000
PEDBD118	1 1/8"	28.6	95000
PEDBD114	1 1/4"	31.8	112000
PEDBD112	1 1/2"	38.1	183000

* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue *



Professional Engineers
Ontario



MCM ROPES & RIGGING LTD.  
www.mcmropes.com