


# 3 STRAND MANILA

3 Strand Manila

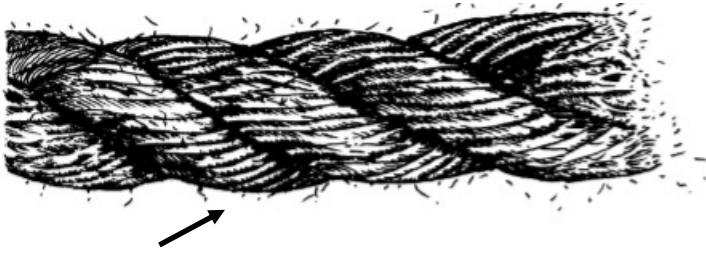

Strands Composed of Twisted Yarns

| Product Code | Size Inches | Size mm | Tensile* Lbs | L.D Lbs/Kft |
|--------------|-------------|---------|--------------|-------------|
| 1308         | 1/4"        | 6.4     | 540          | 20          |
| 1312         | 3/8"        | 9.5     | 1215         | 41          |
| 1316         | 1/2"        | 12.7    | 2385         | 75          |
| 1320         | 5/8"        | 15.9    | 3960         | 133         |
| 1324         | 3/4"        | 19.1    | 4860         | 167         |
| 1332         | 1"          | 25.4    | 8100         | 270         |
| 1340         | 1 1/4"      | 31.8    | 12150        | 418         |
| 1348         | 1 1/2"      | 38.1    | 16650        | 600         |

Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue \*

\*\*Other sizes available upon request, certain sizes may require minimum order quantities\*\*

## Construction:

- ◆ Three strand rope
- ◆ Available in 4 strand
- ◆ Lubricated fibres
- ◆ Philippine seaworthy or hardware grade fibres
- ◆ Medium right lay (Z Twist)
- ◆ Balanced ply construction
- ◆ Will lose about 10% length when wet
- ◆ Rope swells then shrinks when wet

## Features:

- ◆ Natural, bio-degradable
- ◆ Good handling properties
- ◆ Low stretch
- ◆ Cost effective
- ◆ Decorative uses

## Applications:

- ◆ As spinning lines, transmission rope and car pulling rope
- ◆ Used on oilfields
- ◆ Agricultural, trucking and construction applications
- ◆ Theatrical set lines



Professional Engineers  
Ontario



# MCM ROPES & RIGGING LTD.



[www.mcmropes.com](http://www.mcmropes.com)