


# 12 STRAND DYNEEMA®

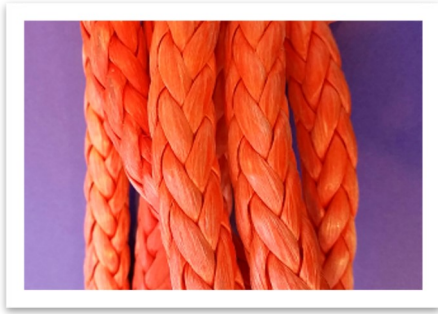

Product Code	Size Inches	Size mm	Tensile* Lbs
2306	3/16"	4.8	5500
2308	1/4"	6.4	8700
2310	5/16"	7.9	13300
2312	3/8"	9.5	19500
2314	7/16"	11.1	23500
2316	1/2"	12.7	34000
2318	9/16"	14.3	41200
2320	5/8"	15.9	52500
2324	3/4"	19.1	66000
2328	7/8"	22.2	95000
2332	1"	25.4	112000
2340	1 1/4"	31.8	170000
2344	1 3/8"	34.9	206000
2348	1 1/2"	38.1	230000
2352	1 5/8"	42	300000
2356	1 3/4"	44	328545
2364	2"	48	384733

Other sizes available upon request

\*Minimum Order Requirements may apply\*

\* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue \*

## Features:

- ◆ Excellent abrasion resistance
- ◆ Extremely high strength
- ◆ Excellent UV resistance without coatings
- ◆ Very low stretch
- ◆ Good dynamic loading
- ◆ Flexible, torque free
- ◆ Spliceable
- ◆ Floats on water

## Construction:

- ◆ Single Braid of 100% Dyneema® fibres
- ◆ Braid composed of 12 individual twisted yarns
- ◆ Urethane coatings available to increase abrasion resistance
- ◆ Custom lengths with splicing and termination hardware available

## Applications:

- ◆ Stringing lines, winch lines, sling and fall lines
- ◆ Topping lifts and chokers
- ◆ Halyards and sheets for running rigging
- ◆ Applications where a very strong, low stretch and light lifting or pulling line is required



Professional Engineers  
Ontario



# MCM ROPES & RIGGING LTD.



[www.mcmropes.com](http://www.mcmropes.com)