


NYLON BRAIDED TWINE

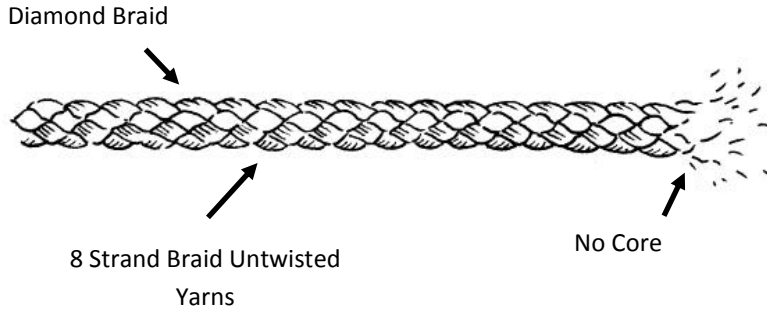

Features:

- ◆ Excellent UV Resistance
- ◆ Excellent abrasion resistance
- ◆ Excellent chemical resistance
- ◆ Resists rot, mildew & marine growth
- ◆ Specific gravity = 1.14

Product Code	Size	Tensile* Lbs	Yield Ft/ Lb
NYBTW9	9	88	2800
NYBTW12	12	115	1800
NYBTW15	15	131	1450
NYBTW18	18	157	1100
NYBTW21	21	190	980
NYBTW24	24	220	860
NYBTW30	30	275	690
NYBTW36	36	323	550
NYBTW42	42	375	480
NYBTW48	48	450	380
NYBTW60	60	500	325
NYBTW72	72	610	260
NYBTW84	84	700	225
NYBTW96	96	800	200
NYBTW108	108	865	180
NYBTW120	120	900	155

Construction:

- ◆ 100% Nylon 6/6
- ◆ 8-strand braided cord
- ◆ Continuous filament Nylon
- ◆ Standard colour; White
- ◆ Custom colours and urethane coatings available

Applications:

- ◆ Lobster and crab pots
- ◆ Nets, long lining, repair cord
- ◆ Mason line
- ◆ All purpose utility cord

* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue *



Professional Engineers
Ontario



MCM ROPES & RIGGING LTD.  

www.mcmropes.com