


HOLLOW BRAID POLYPROPYLENE

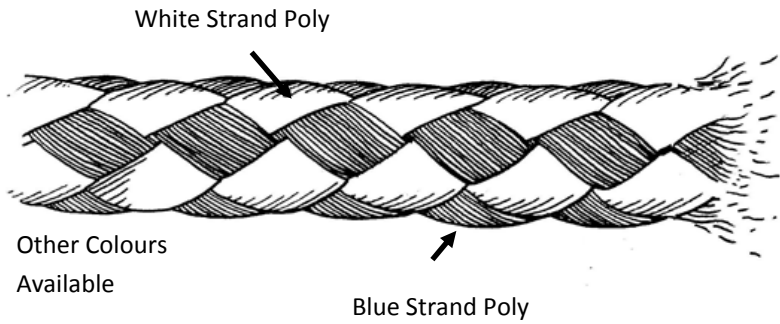

Construction:

- ◆ 16 Strand Single Braid
- ◆ 100% mono-filament polypropylene
- ◆ Diamond Braid
- ◆ Standard colours; 50/50 Blue & White, Solid Yellow, Solid White & Solid Black
- ◆ Custom colours available upon request

Applications:

- ◆ Where a non-rotational floating disposable line are required
- ◆ Suitable for pulling lines for electrical installations

Features:

- ◆ Non rotating
- ◆ Floats (S.G. = 0.91)
- ◆ Easy to splice
- ◆ Economical

Product Code	Size Inches	Size mm	Tensile* Lbs	L.D. Lbs/ Kft
PPHB18	1/8"	3.2	187	3
PPHB316	3/16"	4.8	680	7
PPHB14	1/4"	6.4	1173	11
PPHB516	5/16"	7.9	1853	17
PPHB38	3/8"	9.5	2720	25
PPHB716	7/16"	11.1	3145	35
PPHB12	1/2"	12.7	4250	49
PPHB58	5/8"	15.9	5780	73
PPHB34	3/4"	19.1	7310	97

* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue *



Professional Engineers
Ontario



MCM ROPES & RIGGING LTD.



www.mcmropes.com